


503.46XX

Clés mixtes à cliquet réversible GEARplus®

LES + PRODUITS :

- Selon DIN 3113 / ISO 3318 / ISO 7738
- Angle de fourche 15°
- Œil incliné à 15°
- Cliquet réversible 72 dents
- Finition satinée
- Chrome vanadium

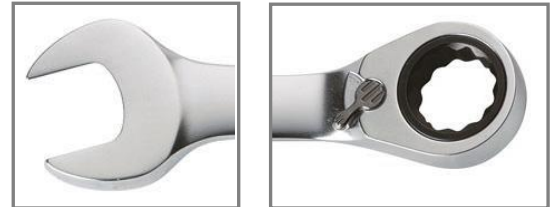

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4606	6		6,3	3,9	14,0	15,0	127,5	30
503.4607	7		6,5	4,6	16,4	16,2	140,0	30
503.4608	8		6,5	4,6	16,4	16,2	140,0	30
503.4609	9		6,9	4,9	18,3	18,2	150,0	40
503.4610	10		7,3	5,3	20,0	20,5	159,0	50
503.4611	11		7,7	5,6	21,4	22,6	166,0	60
503.4612	12		8,2	6,0	22,6	24,6	172,0	70
503.4613	13		8,6	6,4	24,5	26,7	178,0	80
503.4614	14		9,0	6,8	27,0	28,8	191,0	100
503.4615	15		9,4	7,0	28,2	30,8	200,0	120
503.4616	16		9,9	7,2	30,3	33,2	208,0	150
503.4617	17		10,3	7,7	31,6	35,1	225,0	160
503.4618	18		10,7	8,2	32,3	37,2	236,0	190
503.4619	19		11,2	8,8	33,7	39,3	248,0	220
503.4622	22		13,0	9,0	40,1	46,2	290,0	360
503.4624	24		14,5	10,0	46,5	51,5	323,0	470
503.4627	27		15,5	10,5	52,5	56,5	357,0	660
503.4628	30		17,0	11,4	58,5	62,7	400,0	860
503.4629	32		17,5	12,5	62,5	66,4	423,0	1050
503.4630	34		17,5	13,0	62,5	70,6	460,0	1200
503.4643	36		18,0	13,4	65,8	79,0	488,0	1300
503.4644	38		18,0	13,4	65,8	79,0	488,0	1400
503.4681		5/16"	6,5	4,0	16,6	16,7	145,0	30
503.4683		3/8"	7,3	4,8	20,0	20,8	159,0	60
503.4684		7/16"	7,7	5,2	21,8	23,0	165,0	70
503.4685		1/2"	8,6	5,8	24,7	27,1	178,0	80
503.4686		9/16"	9,0	6,5	27,0	29,2	190,0	100
503.4687		5/8"	9,9	6,8	30,0	33,4	208,0	140
503.4688		11/16"	10,3	7,2	31,8	35,5	225,0	170
503.4689		3/4"	11,2	8,2	33,8	39,7	248,0	230