


### EX016H



M Tarauds machine goujures hélicoïdales 45°

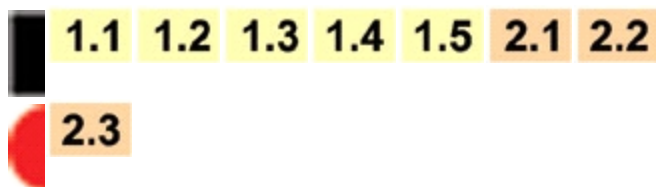

Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible



M	P mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> R mm	□ a mm	l <sub>3</sub> mm	z		l <sub>4</sub> mm	e-code	EUR
2	0.40	45	4	2.8	2.1	5	3	1.6	9	EX01M2	<sup>1)</sup> 29,90
2.5	0.45	50	4	2.8	2.1	5	3	2.05	12.5	EX01M2.5	<sup>1)</sup> 30,05
3	0.50	56	6	3.5	2.7	6	3	2.5	18	EX01M3	21,70
3.5	0.60	56	7	4.0	3.0	6	3	2.9	20	EX01M3.5	24,05
4	0.70	63	7	4.5	3.4	6	3	3.3	21	EX01M4	22,00
5	0.80	70	8	6.0	4.9	8	3	4.2	25	EX01M5	23,25
6	1.00	80	10	6.0	4.9	8	3	5	31	EX01M6	23,35
6	1.00	80	10	4.5	3.4	6	3	5	31	EX01M6DIN376	23,35
7	1.00	80	10	7.0	5.5	8	3	6	31	EX01M7	28,25
8	1.25	90	12	8.0	6.2	9	3	6.8	35	EX01M8	26,65
8	1.25	90	13	6.0	4.9	8	3	6.8	35	EX01M8DIN376	26,65
10	1.50	100	15	10.0	8.0	11	3	8.5	39	EX01M10	32,40
10	1.50	100	15	7.0	5.5	8	3	8.5	39	EX01M10DIN376	32,40
12	1.75	110	16	9.0	7.0	10	3	10.3	-	EX01M12	41,50
14	2.00	110	20	11.0	9.0	12	3	12	-	EX01M14	58,10
16	2.00	110	20	12.0	9.0	12	4	14	-	EX01M16	59,60
18	2.50	125	25	14.0	11.0	14	4	15.5	-	EX01M18	85,80
20	2.50	140	25	16.0	12.0	15	4	17.5	-	EX01M20	91,00
22	2.50	140	25	18.0	14.5	17	4	19.5	-	EX01M22	128,00
24	3.00	160	30	18.0	14.5	17	4	21	-	EX01M24	120,00
27	3.00	160	30	20.0	16.0	19	4	24	-	EX01M27	172,00
30	3.50	180	36	22.0	18.0	21	4	26.5	-	EX01M30	203,00
33	3.50	180	36	25.0	20.0	23	4	29.5	-	EX01M33	293,00
36	4.00	200	40	28.0	22.0	25	4	32	-	EX01M36	325,00

M	P mm	l <sub>1</sub> mm	l <sub>2</sub> mm	d <sub>2</sub> R mm	 a mm	l <sub>3</sub> mm	z		l <sub>4</sub> mm	e-code		EUR
39	4.00	200	40	32.0	24.0	27	4	35	-	EX01M39		425,00
42	4.50	200	45	32.0	24.0	27	4	37.5	-	EX01M42	<sup>1)</sup>	499,00
48	5.00	250	50	36.0	29.0	32	4	43	-	EX01M48	<sup>1)</sup>	724,00
52	5.00	250	50	40.0	32.0	35	5	47	-	EX01M52	<sup>1)</sup>	923,00
56	5.50	250	55	40.0	32.0	35	5	50.5	-	EX01M56	<sup>1)</sup>	1 011,0 0
64	6.00	315	60	50.0	39.0	42	6	58	-	EX01M64	<sup>1)</sup>	1 422,0 0

<sup>1)</sup>HSS-E